

NOTE: D.W.V. METRALOOPS INSTALLED IN ANY ORIENTATION OTHER THAN HANGING DOWN <u>MUST</u> HAVE THE 180° RETURN SUPPORTED. (SEE INSTALLATION INSTRUCTIONS.)

CONTACT FACTORY FOR ADDITIONAL SIZES AND MOVEMENTS. ALL DIMENSIONS IN INCHES.

QTY	SIZE	MODEL	MVMT	Α	В	PSI*	SPRING FORCE**	PROJECT INFO
	4''	MLWILP800400	±4"	38.25"	39"	150	375	


*Working temperature listed is the rating at 70°F. Contact factory for other pressure ratings at other temperatures.

**Spring force: The total force (Lbs) required to move the Metraloop its full rated movement for 150 PSI @ 70°F.

CUSTOMER:	
PROJECT:	
ENGINEER:	

REV.	1	REMOVED 5"	DATE 03/17/2025			
for pip	es in	rafle	2323 W. HUBBARD ST. CHICAGO, IL 60612 TEL: 312-738-3800 FAX: 312-738-0415 WWW.METRAFLEX.COM			
D.W.V. METRALOOP,						
NO	HUB	CONNECTION	ON, ±4" MOVEMENT			
DRAWN I	BY: DI	KISH	DATE: 5/29/2015			
APPROVI	ED: JC		DATE: 5/29/2015			
SCALE:		DRAWING NUMB	ER:			

MLWILP8-4AND5

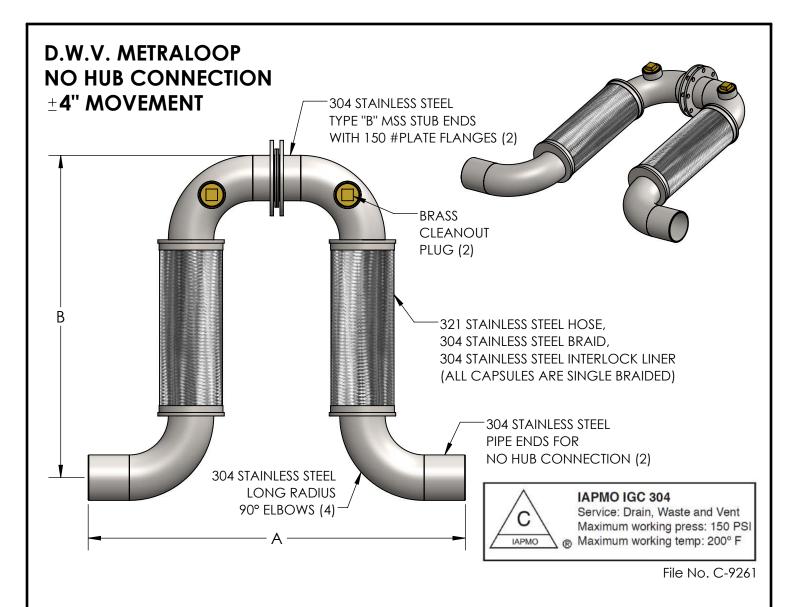

NOTE: D.W.V. METRALOOPS INSTALLED IN ANY ORIENTATION OTHER THAN HANGING DOWN <u>MUST</u> HAVE THE 180° RETURN SUPPORTED. (SEE INSTALLATION INSTRUCTIONS.)

CONTACT FACTORY FOR ADDITIONAL SIZES AND MOVEMENTS. ALL DIMENSIONS IN INCHES.

QTY	SIZE	MODEL	MVMT	Α	В	PSI*	SPRING FORCE**	PROJECT INFO
	6"	MLWILP800600	<u>+</u> 4"	55"	47''	150	520	
	8"	MLWILP800800	±4"	68"	56"	150	600	
	10"	MLWILP801000	±4"	82"	66"	150	800	
	12"	MLWILP801200	±4"	96"	74"	150	1400	

*Working temperature listed is the rating at 70°F. Contact factory for other pressure ratings at other temperatures.

**Spring force: The total force (Lbs) required to move the Metraloop its full rated movement for 150 PSI @ 70°F.

CUSTOMER:_____
PROJECT:_____
ENGINEER:

REV.	DATE			
Met for pipes in	2323 W. HUBBARD ST. CHICAGO, IL 60612 TEL: 312-738-3800 FAX: 312-738-0415 WWW.METRAFLEX.COM			
D.W.V. METRALOOP,				

D.W.V. METRALOOP, NO HUB CONNECTION, ±4" MOVEMENT

DRAWN BY: DKISH

APPROVED: JC

DATE: 5/29/2015

SCALE:

DRAWING NUMBER:

MLWILP8-6TO12