
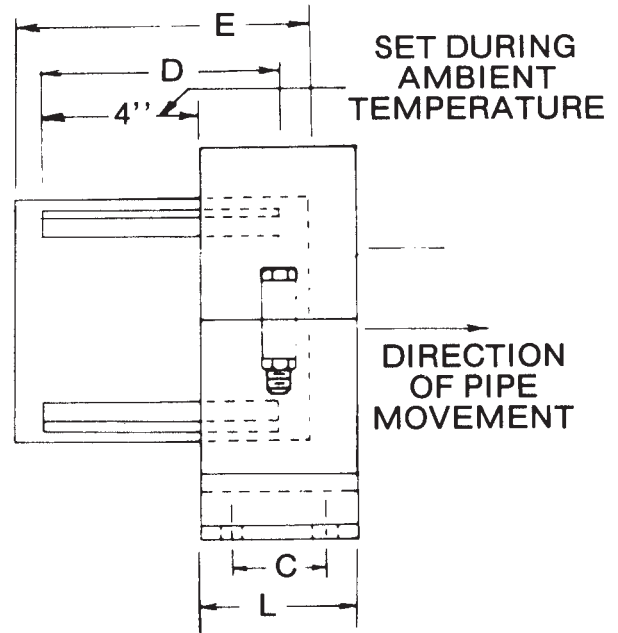


Pre-Insulated Series Model Selection Chart

PIPE SIZE	INSULATION THICKNESS			
	1-1/2"	2"	3"	4"
1/2"	25	26	27	28
3/4"	25	26	27	28
1"	25	26	27	28
1-1/4"	26	26	27	28
1-1/2"	26	27	28	29
2"	26	27	28	29
2-1/2"	27	27	28	30
3"	27	27	28	30
4"	27	28	29	30
5"	28	28	30	31
6"	28	29	30	31
8"	30	30	31	32
10"	31	31	32	33
12"	32	32	33	34
14"	32	33	34	35
16"	33	34	35	-
18"	34	35	36	36

Using the desired insulation thickness and pipe size, choose the model number from this chart and note it on the pre-insulated pipe guide drawing on the following page.

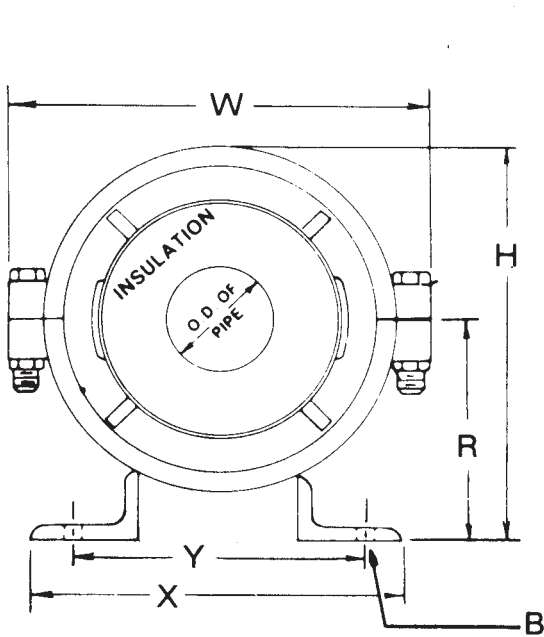

TOTAL QTY	PIPE SIZE	MODEL	H	R	W	X	Y	B	C	L	MAX. MOVE	WT. (LBS.)
		25	7-5/8"	4-1/2"	8-1/8"	6-11/16"	5-1/8"	5/8"	1-3/4"	3"	6"	
		26	9-1/4"	5-1/4"	10-1/8"	7-1/2"	6-1/8"	5/8"	1-3/4"	3"	6"	
		27	11-5/8"	6-1/4"	12-1/8"	8-9/16"	7"	5/8"	2-3/4"	4"	6"	
		28	13-3/8"	7"	14-1/8"	9-11/16"	8-1/4"	5/8"	2-3/4"	4"	6"	
		29	15-1/8"	7-7/8"	16-1/8"	12"	9-7/8"	3/4"	4"	6"	6"	
		30	17"	8-7/8"	19-1/8"	13"	10-7/8"	3/4"	4"	6"	6"	
		31	18-3/4"	9-3/4"	20-1/8"	14"	11-7/8"	3/4"	4"	6"	6"	
		32	21"	10-7/8"	22-1/8"	14"	11-3/4"	3/4"	4"	6"	6"	
		33	23-1/8"	12-1/8"	24-1/8"	16-7/8"	14-1/2"	7/8"	6"	8"	6"	
		34	25"	13"	26-1/8"	18"	15-1/2"	7/8"	6"	8"	6"	
		35	27-3/4"	14-3/4"	28-1/8"	19-1/4"	17-1/8"	1-1/8"	6"	8"	6"	
		36	31-1/2"	16-1/2"	32-1/8"	21-1/4"	19-1/4"	1-1/8"	6"	8"	6"	

Compressibility is 100 P.S.I. Vapor barrier is part of the insulation.

Note: Factory insulation is a hydrous calcium silicate, maximum temperature is 1200°F.

To order: Specify pipe size and maximum insulation thickness.

CUSTOMER _____

PROJECT _____

ENGINEER _____

ARCHITECT _____

PRO. OR P.O. NO _____



DESCRIPTION:

PRE-INSULATED SERIES

DRAWN BY:
JRR

DATE:
1/05

DRAWING NO:
PG -PRE