


SUPERFLEX FLEXIBLE CONNECTORS

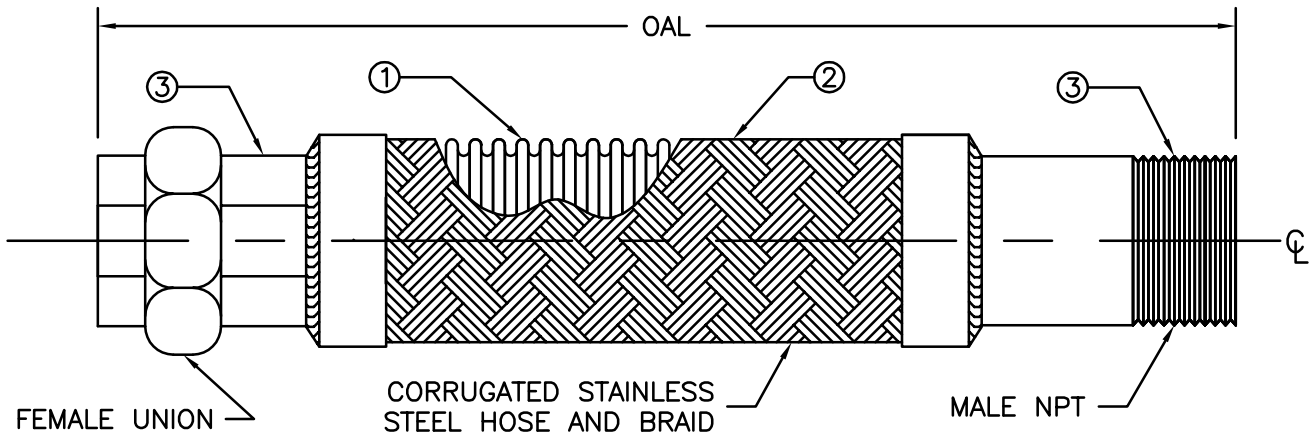

QTY	NPS	OAL (IN)*	END FITTINGS**	MIN. BEND RADIUS		MAX WORKING PRESSURE @70°F (PSI)
				STATIC	DYNAMIC	
	1/2	12,18,24,30,36		1.5"	6.0"	1075
	3/4	12,18,24,30,36		2.0"	9.0"	750
	1	12,18,24,30,36		2.5"	10.0"	605
	1 1/4	12,18,24,30,36		3.0"	11.5"	570
	1 1/2	12,18,24,30,36		3.5"	12.0"	525
	2	12,18,24,30,36		4.5"	17.5"	455

* CUSTOM LENGTHS AVAILABLE

** OTHER ENDS AVAILABLE


TEMPERATURE CORRECTION FACTORS	
TEMP °F	FACTOR
70	1.00
200	0.92
300	0.86
400	0.82
500	0.77
600	0.73

MATERIALS		
1	HOSE	300 SERIES STAINLESS STEEL
2	BRAID	300 SERIES STAINLESS STEEL
3	ENDS	300 SERIES STAINLESS STEEL

CUSTOMER: _____

PROJECT: _____

ENGINEER: _____

REV.	DATE	DESCRIPTION
		 <p>2323 W. HUBBARD ST. CHICAGO, IL 60612 TEL: 312-738-3800 FAX: 312-738-0415 WWW.METRAFLEX.COM</p>
DESCRIPTION: SUPERFLEX STAINLESS STEEL CONNECTOR		
DRAWN BY:	MIR	DATE: 1/3/2012
APPROVED:	ZB	DATE: 1/3/2012
SCALE:	DRAWING NUMBER:	
NONE	SUPERFLEX	