

# MODEL MNLC50 - SIZES 2" THROUGH 8" LOW CORRUGATION EXPANSION JOINT, 50# CLASS






#### **DESIGN DATA**

WORKING PRESSURE: 50 PSI WORKING TEMPERATURE: 800°F

TEST PRESSURE: 75 PSI

### MATERIALS OF CONSTRUCTION

BELLOWS: 316 STAINLESS STEEL 150# FLANGES: CARBON STEEL WELD ENDS: CARBON STEEL SCH STD

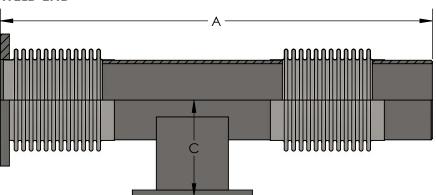

CUSTOM SIZES ARE AVAILABLE.
CONTACT METRAFLEX FOR DETAILS.
WHEN ORDERING, SPECIFY MOVEMENT.

## **DOUBLE WITH ANCHOR BASE (CONTACT FACTORY)**

QTY	PIPE SIZE	SHORT / LONG	AXIAL COMP.	FLANGED ENDS		WELD ENDS		EFFECTIVE	SPRING
				OAL	WT	OAL	WT	AREA	RATE
	2"	S	1-1/8"	6-1/2"	11 LBS	9-7/8"	3 LBS	6 in²	590 lbs/in
		L	1-3/4"	8-1/2"	13 LBS	11-3/4"	4 LBS		315 lbs/in
	2-1/2"	S	1"	7''	14 LBS	9-7/8"	3 LBS	9 in²	498 lbs/in
		L	1-3/4"	8-7/8"	16 LBS	11-3/4"	4 LBS		299 lbs/in
	3"	S	1"	7-3/8"	17 LBS	10-1/2"	5 LBS	12 in²	345 lbs/in
		L	2"	9''	18 LBS	12"	6 LBS		231 lbs/in
	4''	S	1-1/4"	7-1/2"	27 LBS	10-5/8"	8 LBS	19 in²	800 lbs/in
		L	2-1/2"	10-3/4"	28 LBS	13-3/4"	9 LBS		399 lbs/in
	5"	S	1-1/4"	7-5/8"	33 LBS	10-5/8"	13 LBS	29 in²	985 lbs/in
		L	2-1/2"	11-1/4"	34 LBS	14-1/4"	15 LBS		465 lbs/in
	- 6"	S	1-1/4"	8''	43 LBS	11"	18 LBS	40 in²	1170 lbs/in
		L	2-1/2"	11-1/2"	47 LBS	14-1/2"	20 LBS		549 lbs/in
	8"	S	1-1/2"	9-1/4"	64 LBS	12-1/8"	22 LBS	66 in²	1220 lbs/in
		L	3"	13-1/4"	71 LBS	16-1/8"	26 LBS		609 lbs/in

#### NSF 372 - LEAD FREE

The wetted surface of this product contacted by consumable water contains less than one quarter of one percent (0.25%) of lead by weight. Material complies with state codes and standards, where applicable, requiring reduced lead content.

CUSTOMER:			
PROJECT:			
ENGINEER:			

REV.	DATE
Me for pipes in	2323 W. HUBBARD ST. CHICAGO, IL 60612 TEL: 312-738-3800 FAX: 312-738-0415 WWW.METRAFLEX.COM

## MODEL MNLC

LOW CORRUGATION EXPANSION JOINT, 50# CLASS

DRAWN BY: <b>D</b>	KISH	DATE: <b>2/1/2018</b>
APPROVED: <b>J</b> (		DATE: <b>2/1/2018</b>
SCALE: DRAWING NUM		
NTS	M	NLC50-2TO8-1