

MODEL MNLC150 - SIZES 2" THROUGH 8" **LOW CORRUGATION EXPANSION JOINT, 150# CLASS**





DESIGN DATA


WORKING PRESSURE: 150 PSI

MAXIMUM WORKING TEMPERATURE: 500°F

TEST PRESSURE: 225 PSI

MATERIALS OF CONSTRUCTION

BELLOWS: 316 STAINLESS STEEL 150# FLANGES: CARBON STEEL WELD ENDS: CARBON STEEL SCH STD

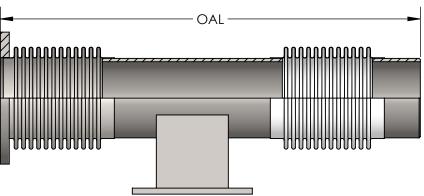

CUSTOM SIZES ARE AVAILABLE. CONTACT METRAFLEX FOR DETAILS. WHEN ORDERING, SPECIFY MOVEMENT.

DOUBLE WITH ANCHOR BASE (CONTACT FACTORY)

QTY	PIPE SIZE	SHORT / LONG	AXIAL COMP.	FLANGED ENDS		WELD ENDS		EFFECTIVE	SPRING
				OAL	WT	OAL	WT	AREA	RATE
	2"	S	1-1/8"	6-1/2"	11 LBS	9-7/8"	3 LBS	6 in²	595 lbs/in
		L	1-3/4"	8-1/2"	13 LBS	11-3/4"	4 LBS		320 lbs/in
	2-1/2"	S	1"	7''	14 LBS	9-7/8"	3 LBS	9 in²	498 lbs/in
		L	1-3/4"	8-7/8"	16 LBS	11-3/4"	4 LBS		299 lbs/in
	3"	S	1"	7-3/8"	20 LBS	10-1/2"	5 LBS	12 in²	349 lbs/in
		L	2"	9"	21 LBS	12"	6 LBS		240 lbs/in
	4"	S	1-1/4"	7-1/2"	35 LBS	10-5/8"	8 LBS	19 in²	803 lbs/in
		L	2-1/2"	10-3/4"	38 LBS	13-3/4"	9 LBS		406 lbs/in
	5"	S	1-1/4"	7-5/8"	45 LBS	10-5/8"	13 LBS	29 in²	987 lbs/in
		L	2-1/2"	11-1/4"	49 LBS	14-1/4"	15 LBS		480 lbs/in
	6"	S	1-1/4"	8"	85 LBS	11"	18 LBS	40 in²	1181 lbs/in
		L	2-1/2"	11-1/2"	90 LBS	14-1/2"	20 LBS		555 lbs/in
	8"	S	1-1/2"	9-1/4"	120 LBS	12-1/8"	22 LBS	66 in²	1235 lbs/in
		L	3"	13-1/4"	125 LBS	16-1/8"	26 LBS		620 lbs/in

NSF 372 - LEAD FREE

The wetted surface of this product contacted by consumable water contains less than one quarter of one percent (0.25%) of lead by weight. Material complies with state codes and standards, where applicable, requiring reduced lead content.

CUSTOMER:
PROJECT:
ENGINEER:

REV.	1	ADJUST 1	TEMP RATING	DATE 7/6/2022
M for pipe	es in	ra motion	Tex.	2323 W. HUBBARD ST. CHICAGO, IL 60612 TEL: 312-738-3800 FAX: 312-738-0415 WWW.METRAFLEX.COM
MODEL MANIC				

MODEL WINE

LOW CORRUGATION EXPANSION JOINT, 150# CLASS

DRAWN BY: DKISH	DATE: 2/1/2018
APPROVED: JC	DATE: 2/1/2018

SCALE: DRAWING NUMBER: NTS MNLC150-2TO8-1