


**MODEL ELASTOFLEX
STAINLESS STEEL BRAIDED FLEXIBLE CONNECTOR
WITH PEROXIDE-CURED EPDM CORE**

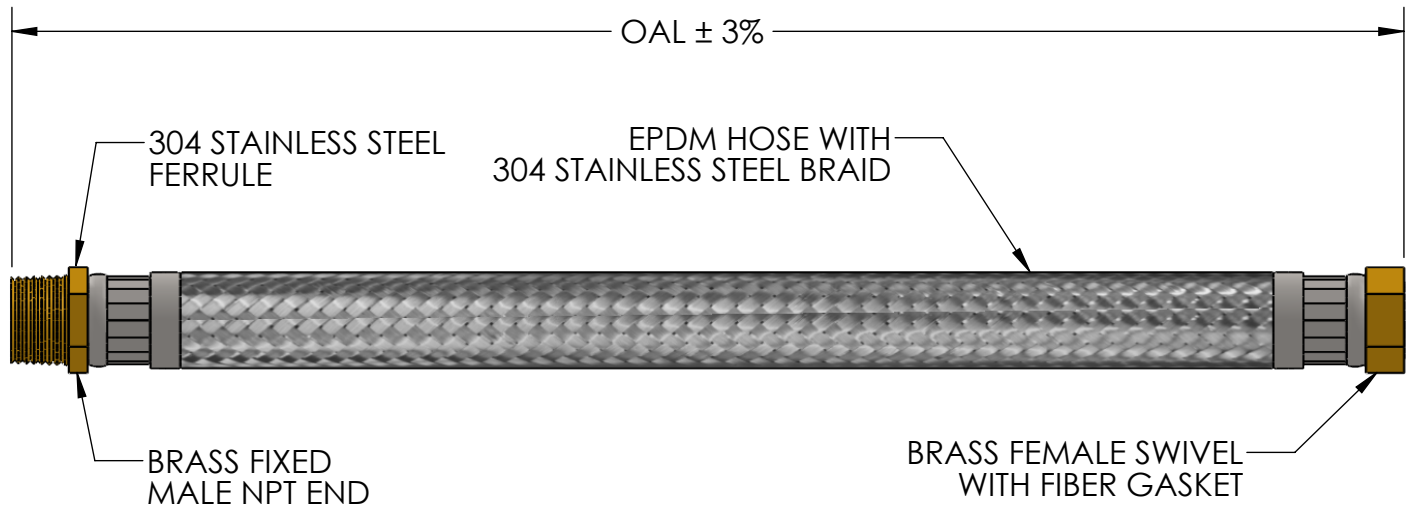

OPTIONAL GASKETLESS SWIVEL CONNECTION AVAILABLE FOR SIZES 1/2", 3/4", AND 1" ONLY.

QTY	PART NUMBER	SIZE	OAL	BEND RADIUS*	PRESSURE RATING
	ELFT050-(12-36)	1/2"	12" - 36"	2-5/8"	350 PSI @ 70°F
	ELFT075-(12-36)	3/4"	12" - 36"	4-1/2"	300 PSI @ 70°F
	ELFT100-(12-36)	1"	12" - 36"	5-1/2"	230 PSI @ 70°F
	ELFT125-(12-36)	1-1/4"	12" - 36"	6-3/4"	160 PSI @ 70°F
	ELFT150-(12-36)	1-1/2"	12" - 36"	8-3/8"	150 PSI @ 70°F
	ELFT200-(12-36)	2"	12" - 36"	11-1/8"	100 PSI @ 70°F

*MINIMUM DYNAMIC BEND RADIUS FROM CENTERLINE

NOTES:

- 1) MAXIMUM TEMPERATURE RANGE
5°F - 200°F.
- 2) THIS CONNECTOR IS DESIGNED FOR WATER ONLY, NOT FOR GAS. INTERNAL OR EXTERNAL CONTACT WITH PETROLEUM BASED PRODUCTS OR WITH DI-ESTER BASED LUBRICANTS WILL DAMAGE THE POLYMER CORE.
- 3) NOT FOR USE IN VACUUM SERVICE.

EPDM CAN BE USED WITH ANTIFREEZE SOLUTIONS USING ETHYLENE GLYCOL OR PROPYLENE GLYCOL AND WATER. OTHER ADDITIVES MAY AFFECT COMPATIBILITY. CONSULT THE MANUFACTURER OF THE ANTIFREEZE FOR THEIR RECOMMENDATION.

CUSTOMER: _____

PROJECT: _____

ENGINEER: _____

2	2" ADDED	04/20/2026
REV. 1	UPDATED MAX TEMP TO 200 DEG F	DATE 02/27/2012

Metraflex
for pipes in motion

2323 W. HUBBARD ST.
CHICAGO, IL 60612
TEL: 312-738-3800
FAX: 312-738-0415
WWW.METRAFLEX.COM

ELASTOFLEX CONNECTOR
MALE NPT x FEMALE SWIVEL

DRAWN BY: RUBENC	DATE: 05/11/2026
APPROVED: JACKSONK	DATE: 05/12/2026
SCALE: N/A	DRAWING NUMBER: ELF-2