


**MODEL ELASTOFLEX
STAINLESS STEEL BRAIDED FLEXIBLE CONNECTOR
WITH PEROXIDE-CURED EPDM CORE**

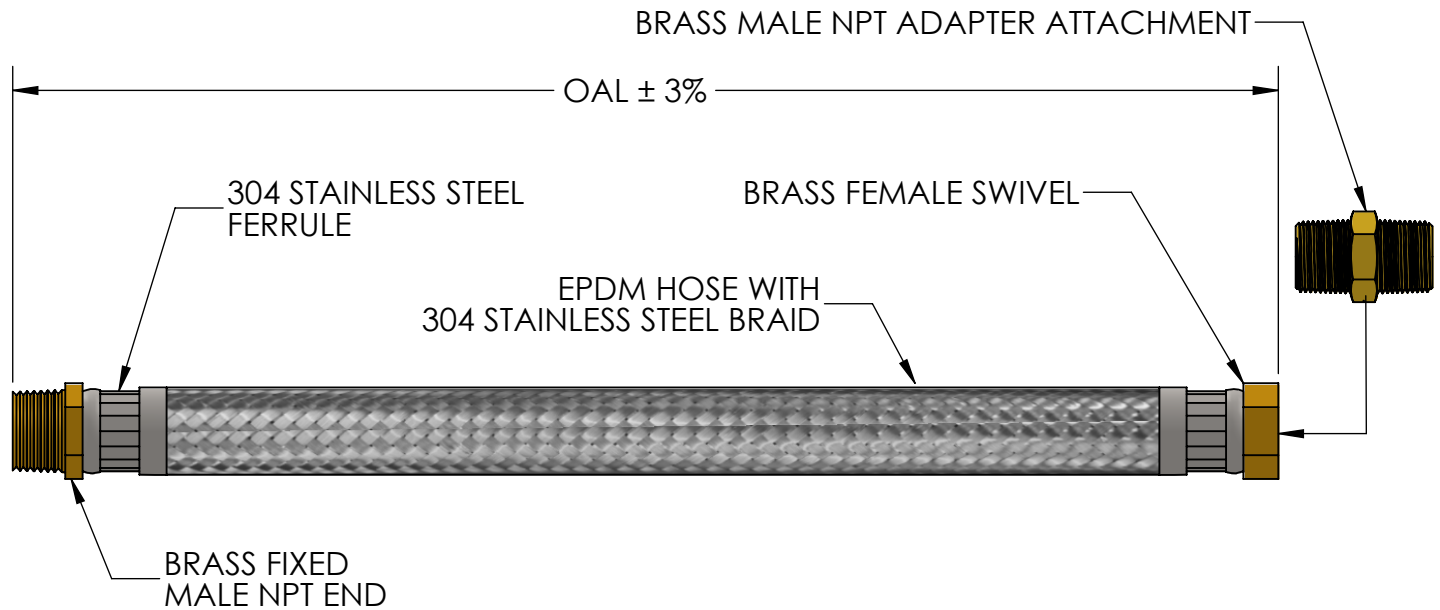

QTY	PART NUMBER	SIZE	OAL	BEND RADIUS*	PRESSURE RATING
	ELFTMFC050-(12-36)	1/2"	12"-36"	2-5/8"	350 PSI @ 70°F
	ELFTMFC075-(12-36)	3/4"	12"-36"	4-1/2"	300 PSI @ 70°F
	ELFTMFC100-(12-36)	1"	12"-36"	5-1/2"	230 PSI @ 70°F

*MINIMUM DYNAMIC BEND RADIUS FROM CENTERLINE

NOTES:


- 1) MAXIMUM TEMPERATURE RANGE
5°F - 200°F.
- 2) THIS CONNECTOR IS DESIGNED FOR WATER ONLY, NOT FOR GAS. INTERNAL OR EXTERNAL CONTACT WITH PETROLEUM BASED PRODUCTS OR WITH DI-ESTER BASED LUBRICANTS WILL DAMAGE THE POLYMER CORE.
- 3) NOT FOR USE IN VACUUM SERVICE.

EPDM CAN BE USED WITH ANTIFREEZE SOLUTIONS USING ETHYLENE GLYCOL OR PROPYLENE GLYCOL AND WATER. OTHER ADDITIVES MAY AFFECT COMPATIBILITY. CONSULT THE MANUFACTURER OF THE ANTIFREEZE FOR THEIR RECOMMENDATION.

CUSTOMER: _____

PROJECT: _____

ENGINEER: _____

REV.	DATE
	
2323 W. HUBBARD ST. CHICAGO, IL 60612 TEL: 312-738-3800 FAX: 312-738-0415 WWW.METRAFLEX.COM	
ELASTOFLEX CONNECTOR MALE NPT x MALE NPT ADAPTER	
DRAWN BY: RUBENC	DATE: 05/08/2026
APPROVED: JACKSONK	DATE: 05/12/2026
SCALE: N/A	DRAWING NUMBER: ELFTMFC