
MODEL HPWD4 DUAL HIGH PRESSURE EXTERNALLY PRESSURIZED EXPANSION COMPENSATOR

DESIGN DATA

TEMPERATURE: 500°F (260°C)
PRESSURE: 175 PSI (1206 kPa)
TEST PRESSURE: 250 PSI (1809 kPa)
AXIAL COMPRESSION: 4" (100mm)
AXIAL EXTENSION: 1" (25mm)



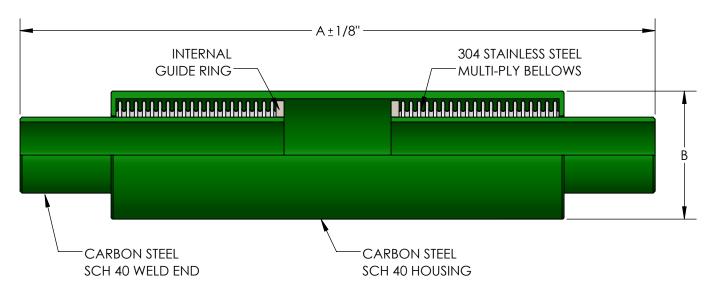

THIS EXPANSION JOINT IS DESGINED FOR AXIAL MOVEMENT ONLY. PIPE MUST BE PROPERLY GUIDED AND ANCHORED PER THE RECOMMENDATIONS OF THE EXPANSION JOINT MANUFACTURERS ASSOCIATION.

QTY	PART NUMBER	PIPE SIZE			В	EFFECTIVE	SPRING RATE	WEIGHT	PROJECT INFORMATION
QII		INCH	MM	Α	В	AREA (in²)	(lb/in)	WLIGHT	T ROJECT IN ORMATION
	HPWD40075	3/4"	20	23-1/2"	2-3/8"	1.5	41	4	
	HPWD40100	1"	25	23-1/2"	2-1/2"	2.1	44	6	
	HPWD40125	1-1/4"	32	23"	3"	3.3	38	6	
	HPWD40150	1-1/2"	38	23-1/2"	3-1/2"	4.3	61	8	
	HPWD40200	2"	50	23"	4''	6.3	72	12	
	HPWD40250	2-1/2"	65	23"	5"	8.8	94	16	
	HPWD40300	3"	80	24-1/4"	5-1/2"	13.1	115	21	
	HPWD40400	4''	100	24-3/4"	6-5/8"	20.8	242	28	

NSF 372 - LEAD FREE

The wetted surface of this product contacted by consumable water contains less than one quarter of one percent (0.25%) of lead by weight. Material complies with state codes and standards, where applicable, requiring reduced lead content. Not suitable for potable water systems due to materials of construction.

CUSTOMER:
PROJECT:
ENGINEER:

for pipes in	motion		TEL: 312-738-3 FAX: 312-738-3 WWW.METRA	-0415
M	traf		2323 W. HUBI CHICAGO, IL	. 60612
REV. 1	TEMP TO 5	500F	DATE	6/1/2021

DUAL HIGH PRESSURE EXPANSION COMPENSATOR

DRAWN BY: D	KISH	DAIE: 9/3/2015			
APPROVED: J (DATE:	9/3/2015		
SCALE:	DRAWING NUMB	ER:			
NI/A	HD/MD/I				