
MODEL SDFS

SUCTION DIFFUSER FLEX WITH 150# PLATE FLANGES DESIGNED TO BE INSTALLED IMMEDIATELY UP-STREAM OF A SHORT RADIUS 90° ELBOW

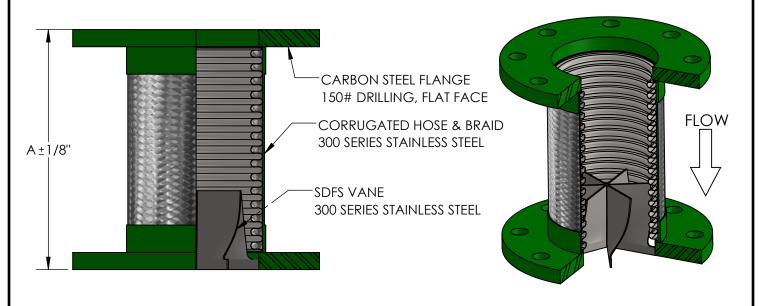

QTY	PART NUMBER	PIPE SIZE		٨	PRESSURE	WEIGHT	PROJECT INFORMATION
		INCH	MM	A	RATING (PSI)*	(LBS)	PROJECT INFORMATION
	SDFS0200	2"	50	9"	516	10	
	SDFS0250	2-1/2"	65	9"	387	15	
	SDFS0300	3"	80	9"	316	16	
	SDFS0400	4"	100	9"	232	21	
	SDFS0500	5"	125	11"	191	28	
	SDFS0600	6"	150	11"	165	32	
	SDFS0800	8"	200	12"	234	56	
	SDFS1000	10"	250	13"	230	80	
	SDFS1200	12"	300	14"	161	110	
	SDFS1400	14"	350	14"	150	120	

*FOR SAFE WORKING PRESSURE ABOVE 70°F, MULTIPLY THE PRESSURE SHOWN AT 70°F TIMES THE CORRECTION FACTOR OF THE REQUIRED TEMPERATURE.

TEMPERATURE (°F)	FACTOR
70	1.0
200	.91
300	.85
400	.78
500	.77
600	.76

CUSTOMER:______
PROJECT:______
ENGINEER:_____

MAX INTERMITTENT OFFSET FROM CENTERLINE 1/8" MAX PERMANENT OFFSET FROM CENTERLINE 3/8"

NSF 372 - LEAD FREE

The wetted surface of this product contacted by consumable water contains less than one quarter of one percent (0.25%) of lead by weight. Material complies with state codes and standards, where applicable, requiring reduced lead content.

Tor pip	es in	motion W	WW.METRAFLEX.COM
M	et	ratex	823 W. HUBBARD ST. HICAGO, IL 60612 L: 312-738-3800 XX: 312-738-0415
REV.	1	TEMP FACTOR UPDATED	DATE 1/4/2017
REV.	2	EDITED VANE NOTE	11/18/2024

MODEL SDFS

SDF WITH 150# PLATE FLANGES FOR SR ELBOW

DRAWN BY: DKISH	DATE: 11/22/2013	
APPROVED: JC	DATE: 11/22/2013	
SCALE: DRAWING NUM	DRAWING NUMBER: SDFS-2	