
MODEL RMF REDUCING FLANGED FLEXIBLE PUMP CONNECTOR

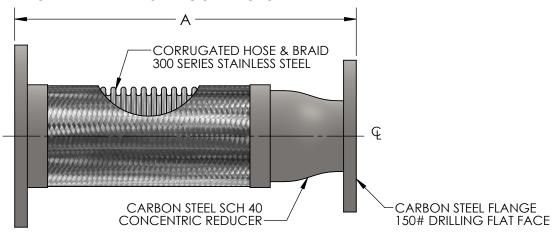

QTY	PART NUMBER	PIPE SIZE		Α	PRESSURE	WEIGHT	PROJECT INFORMATION
וועט	I AKI NOMBER	LARGER	SMALLER	^	RATING (PSI)*	(LBS)	T ROJECT IN ORMATION
	RMF0215	2"	1-1/2"	12-1/4"	516	10	
	RMF2502	2-1/2"	2"	12-1/4"	387	15	
	RMF0315		1-1/2"				
	RMF0302	3"	2"	12-1/4"	316	1 <i>7</i>	
•	RMF0325		2-1/2"				
	RMF0402		2"				
	RMF0425	4''	2-1/2"	12-3/4"	232	22	
	RMF0403		3"				
	RMF0525		2-1/2"				
	RMF0503	5''	3"	15-3/4"	191	31	
	RMF0504		4"				
	RMF0602		2"			36	
	RMF0625		2-1/2"]			
	RMF0603	6''	3"	16-1/4"	165		
	RMF0604		4"				
	RMF0605		5"				
	RMF0804	8" 5"	4''			65	
	RMF0805		5"	17-1/2"	234		
	RMF0806		6"				
	RMF1006	10"	6"	19-1/2"	230	97	
	RMF1008	10	8"				
	RMF1206		6"			137	
	RMF1208	12"	8"	21-1/2"	161		
	RMF1210		10"				

*FOR SAFE WORKING PRESSURE ABOVE 70°F, MULTIPLY THE PRESSURE SHOWN AT 70°F TIMES THE CORRECTION FACTOR OF THE REQUIRED TEMPERATURE.

TEMPERATURE (°F)	FACTOR
70	1.0
200	.91
300	.85
400	.78
500	.77
600	.76

CUSTOMER:	
PROJECT:	
ENICINIEED.	

MAX INTERMITTENT OFFSET FROM CENTERLINE 1/8" MAX PERMANENT OFFSET FROM CENTERLINE 3/8"

NSF 372 - LEAD FREE

The wetted surface of this product contacted by consumable water contains less than one quarter of one percent (0.25%) of lead by weight. Material complies with state codes and standards, where applicable, requiring reduced lead content. Not suitable for potable water systems due to materials of construction.

2 RMF1			ADDED		6/25/2019
REV.	1	TEMP FAC	CTOR UPDAT	ED	DATE 12/28/2016
for pip	es in	ro motion	lex.	CHICA TEL: 31 FAX: 3	v. Hubbard St. GO, Il 60612 2-738-3800 12-738-0415 Metraflex.com

MODEL RMF

REDUCING FLANGED FLEXIBLE PUMP CONNECTOR

DRAWN BY: D I	KISH	DATE:	1/10/2014	
APPROVED: J (3	DATE:	1/10/2014	
SCALE:	DRAWING NUMBER:			
N/A	RMF-2			