

Note: Do not use wrenches on hose or braid collar.

Qty	Part Number	Size I.D. (in)	A ± 1/8 (in)	Pressure* (PSI)	Weight (Lbs)	Project Info
	BBCT0050	1/2	10	450	0.5	
	BBCT0075	3/4	10	340	0.8	
	BBCT0100	1	10	250	1	
	BBCT0125	1-1/4	10	200	1.5	
	BBCT0150	1-1/2	12	200	2	
	BBCT0200	2	14	170	3	
	BBCT0250	2-1/2	16	150	4	
	BBCT0300	3	16	150	6	


MAX INTERMITTENT OFFSET FROM CENTERLINE 1/4"  
 MAX PERMANENT OFFSET FROM CENTERLINE 1/2"

\*For safe working pressure above 70°F, multiply the pressure shown at 70°F times the correction factor of the required temperature.

Temperature (°F)	Factor
70	1.0
150	.92
200	.89
250	.86
300	.83
350	.81

### LEAD FREE


The wetted surface of this product contacted by consumable water contains less than one quarter of one percent (0.25%) of lead by weight. Material complies with state codes and standards, where applicable, requiring reduced lead content.

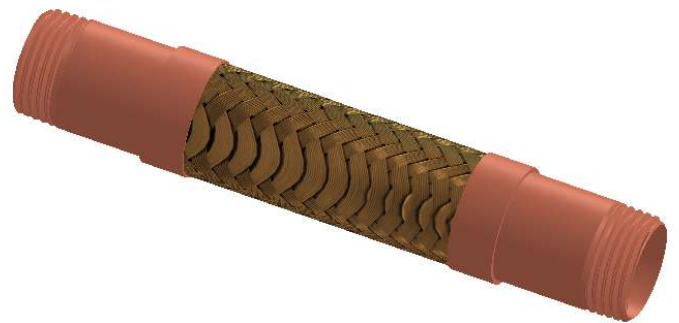

CUSTOMER: \_\_\_\_\_

PROJECT: \_\_\_\_\_

ENGINEER: \_\_\_\_\_

REV.	DATE
	
2323 W. HUBBARD ST. CHICAGO, IL 60612 TEL: 312-738-3800 FAX: 312-738-0415 WWW.METRAFLEX.COM	
<b>MODEL BBCT</b> <b>THREADED BRONZE CONNECTOR</b>	
DRAWN BY: DKISH	DATE: 1/10/2014
APPROVED: JC	DATE: 1/10/2014
SCALE: NONE	DRAWING NUMBER: BBCT