
MODEL HPF2 HIGH PRESSURE EXTERNALLY PRESSURIZED EXPANSION COMPENSATOR


DESIGN DATA

CONFORMS TO MIL-DTL-17813H

MAXIMUM WORKING TEMPERATURE: 500° (260°C) MAXIMUM WORKING PRESSURE: 175 PSI (1206 kPa) MAXIMUM TEST PRESSURE: 250 PSI (1809 kPa) @ 70°F

AXIAL COMPRESSION: 2" (50mm) AXIAL EXTENSION: 1/2" (13mm)

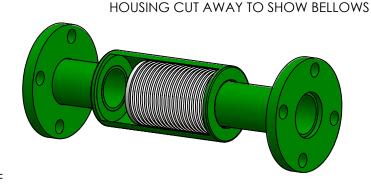

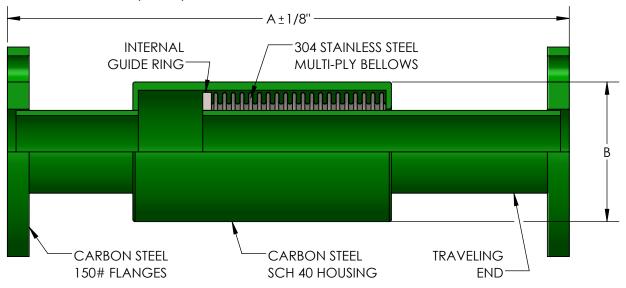

THIS EXPANSION JOINT IS DESCINED FOR AXIAL MOVEMENT ONLY. PIPE MUST BE PROPERLY GUIDED AND ANCHORED PER THE RECOMMENDATIONS OF THE EXPANSION JOINT MANUFACTURERS ASSOCIATION.

QTY	PART NUMBER	PIPE :	SIZE	Α	В	EFFECTIVE AREA (in²)	SPRING RATE (lb/in)	WEIGHT	PROJECT INFORMATION
	HPF20075	3/4"	20	13-3/8"	3"	1.5	81	8	
	HPF20100	1"	25	13-7/8"	3"	2.1	88	9	
	HPF20125	1-1/4"	32	13-7/8"	3"	3.3	75	12	
	HPF20150	1-1/2"	38	15-1/4"	3-1/2"	4.3	121	14	
	HPF20200	2"	50	15-1/4"	4"	6.3	143	18	
	HPF20250	2-1/2"	65	16-5/8"	5"	8.8	187	29	
	HPF20300	3"	80	16-5/8"	5-1/2"	13.1	230	34	
	HPF20400	4"	100	1 <i>7</i> ''	6-5/8"	20.8	484	47	

SCALE:

NSF 372 - LEAD FREE

The wetted surface of this product contacted by consumable water contains less than one quarter of one percent (0.25%) of lead by weight. Material complies with state codes and standards, where applicable, requiring reduced lead content.

CUSTOMER:
PROJECT:
ENGINEER:

2	Edit temperature-pressure ration	ng. Add compliance	01/07/2021				
REV. 1	Edit B dimension to 3"	on lines 1 and 2.	DATE: 08/27/2019				
Me for pipe	etrafle s in motion	CHICAG TEL: 312 FAX: 31 WWW.	. HUBBARD ST. GO, IL 60612 2-738-3800 2-738-0415 METRAFLEX.COM				
MODEL HPF2							
HIGH PRESSURE EXPANSION COMPENSATOR							
DRAWN BY	: DKISH	DATE: 9/3/2					
APPROVED	D: JC	DATE: 9/3/2	2015				

HPF2

DRAWING NUMBER: