


**MODEL VF
VANEFLEX WITH 150# PLATE FLANGES**

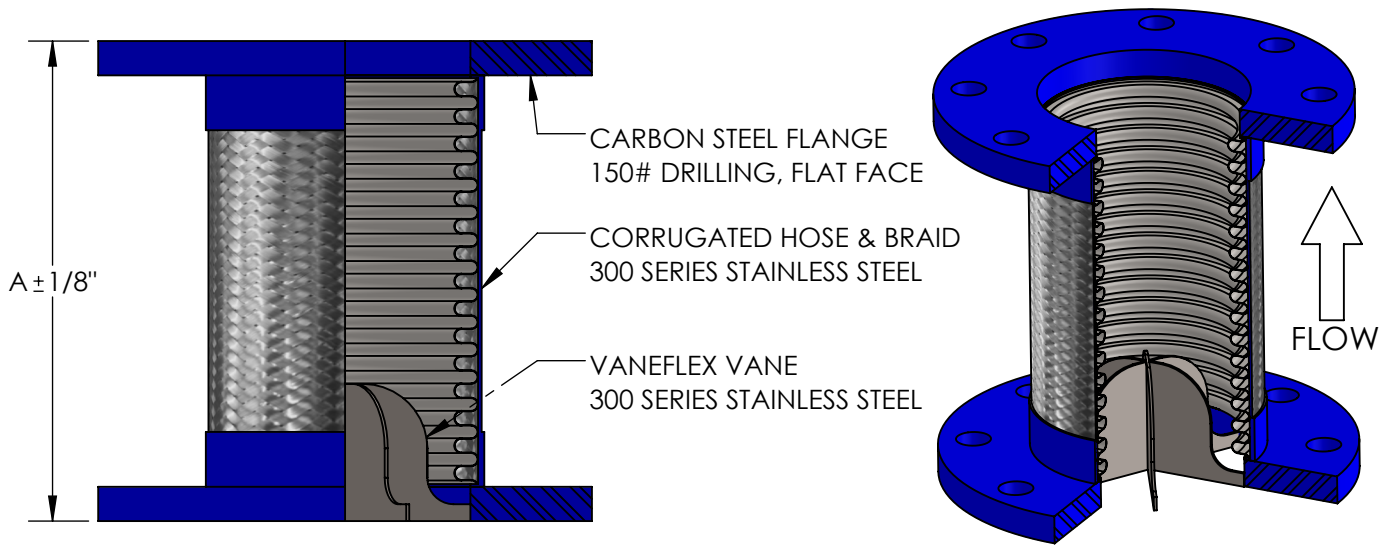

QTY	PART NUMBER	PIPE SIZE		A	PRESSURE RATING (PSI)*	WEIGHT (LBS)	PROJECT INFORMATION
		INCH	MM				
	VF0200	2"	50	9"	516	10	
	VF0250	2-1/2"	65	9"	387	15	
	VF0300	3"	80	9"	316	16	
	VF0400	4"	100	9"	232	21	
	VF0500	5"	125	11"	191	28	
	VF0600	6"	150	11"	165	32	
	VF0800	8"	200	12"	234	56	
	VF1000	10"	250	13"	230	80	
	VF1200	12"	300	14"	161	110	
	VF1400	14"	350	14"	150	120	

*FOR SAFE WORKING PRESSURE ABOVE 70°F, MULTIPLY THE PRESSURE SHOWN AT 70°F TIMES THE CORRECTION FACTOR OF THE REQUIRED TEMPERATURE.

TEMPERATURE (°F)	FACTOR
70	1.0
200	.91
300	.85
400	.78
500	.77
600	.76

MAX INTERMITTENT OFFSET FROM CENTERLINE 1/8"
MAX PERMANENT OFFSET FROM CENTERLINE 3/8"


NSF 372 - LEAD FREE

The wetted surface of this product contacted by consumable water contains less than one quarter of one percent (0.25%) of lead by weight. Material complies with state codes and standards, where applicable, requiring reduced lead content. Not suitable for potable water systems due to materials of construction.

CUSTOMER: _____

PROJECT: _____

ENGINEER: _____

REV.	1	TEMP FACTOR UPDATED	DATE 1/4/2017
		2323 W. HUBBARD ST. CHICAGO, IL 60612 TEL: 312-738-3800 FAX: 312-738-0415 WWW.METRAFLEX.COM	
MODEL VF VANEFLEX WITH 150# PLATE FLANGES			
DRAWN BY: DKISH		DATE: 11/22/2013	
APPROVED: JC		DATE: 11/22/2013	
SCALE:	N/A	DRAWING NUMBER:	VF-1